


# CAPTAIN CLASS - PRINTED CIRCUIT MOUNT, STANDARD PROFILE POWER TRANSFORMER

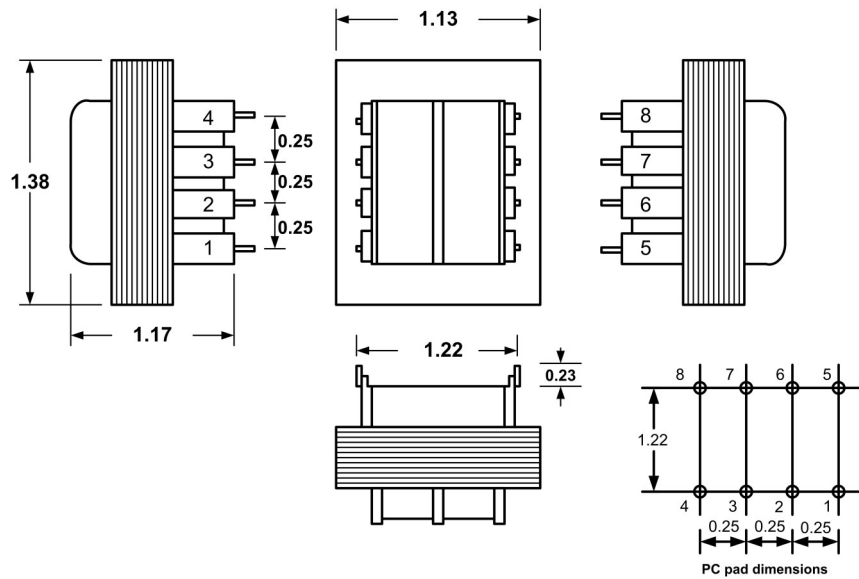

## 1. Electrical Specifications


- A. Maximum Power: 2.4VA
- B. Input Voltage and Frequency: 115V, 115/230V, 230V @ 50/60Hz
- C. Voltage Regulation: 18% TYP @ Full Load to No Load
- D. Temperature Rise: 20°C TYP
- E. Insulation Resistance: > 1 MEG ohm
- F. Hi-Pot: 2500 Vrms 1 minute

- 2. Marking: Ensign Corp, part number (see table), date code, terminal numbers
- 3. Agency Approval:

UL/cUL 5085-2 Recognized (File 47299)  
 UL 1446 Recognized Insulation System (File 95662)  
 UL/cUL 5085-3 Class 2 Recognized (File E43609), models marked (\*)




### Primary Schematics



Single Input  
(Specify 115V,  
120V, 230V or  
240V)

Dual Input  
(Specify  
115/230V or  
120/240V)

### Secondary Schematics

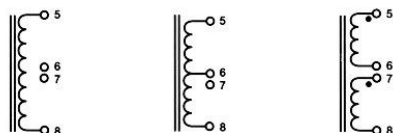

Single  
Output

Center-Tapped  
Output

Dual  
Output

Part No.			Series Connection	Parallel Connection
115V	115/230V	230V		
P002-1-010X*	P002-2-010X*	P002-3-010X*	10VCT @ 0.25A	5V @ 0.5A
P002-1-012X*	P002-2-012X*	P002-3-012X*	12.6VCT @ 0.2A	6.3V @ 0.4A
P002-1-016X*	P002-2-016X*	P002-3-016X*	16VCT @ 0.15A	8V @ 0.30A
P002-1-020X*	P002-2-020X*	P002-3-020X*	20VCT @ 0.12A	10V @ 0.24A
P002-1-024X*	P002-2-024X*	P002-3-024X*	24VCT @ 0.1A	12V @ 0.2A
P002-1-028X	P002-2-028X	P002-3-028X	28VCT @ 0.085A	14V @ 0.17A
P002-1-036X	P002-2-036X	P002-3-036X	36VCT @ 0.065A	18V @ 0.13A
P002-1-048X	P002-2-048X	P002-3-048X	48VCT @ 0.05A	24V @ 0.1A
P002-1-056X	P002-2-056X	P002-3-056X	56VCT @ 0.045A	28V @ 0.09A
P002-1-120X	P002-2-120X	P002-3-120X	120VCT @ 0.02A	60V @ 0.04A



**POWER TRANSFORMER  
CAPTAIN CLASS**

**P002-1-XXXX  
P002-2-XXXX  
P002-3-XXXX**

CONTENTS OF THIS DRAWING ARE SUBJECT TO  
CHANGE WITHOUT PRIOR NOTICE

**Ensign Corporation**  
201 ENSIGN RD., BELLEVUE, IA 52031

Dim: Inches

Sheet 1 of 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH ENSIGN RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING